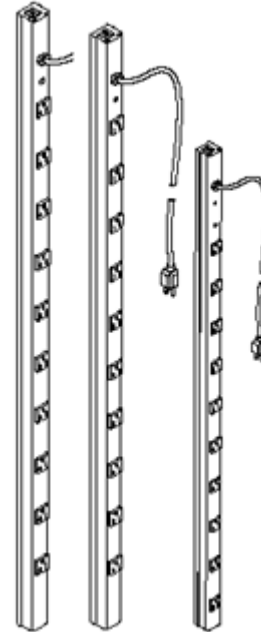


Plug-In 15 & 20 Amp Cabinet Protectors

Bring power safely and conveniently to wherever your need it with a full line of standard and custom **Plug-In Rackmount & Cabinet Units**. These units are ideal for use in a wide variety of settings, including relay racks and cabinets, laboratories, workshops, classrooms and offices.

Plug-In Rackmount & Cabinet units include compact, 90°, deluxe control, industrial, hospital grade, and international units. Most are available in both 15 and 20 Amp configurations.

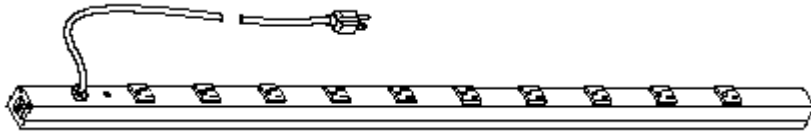
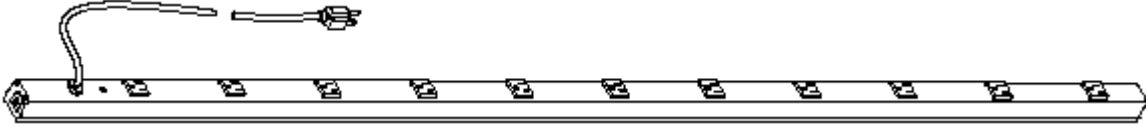
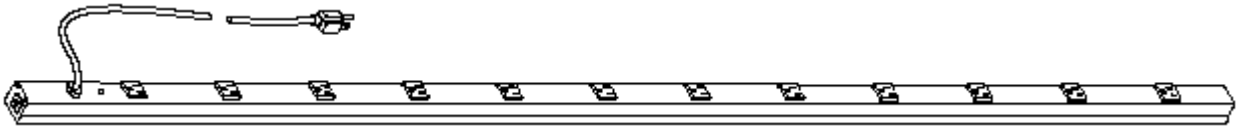


Product Features




- **User-Ready Units**
 - ▶ Plug-in units provide power distribution in a portable, plug-in unit.
- **Rugged Construction**
 - ▶ Durable 2" x 1¾" (44mm x 51mm) or 3½" x 2" (89mm x 44mm) aluminum housing. Some plug-in units are available with an impact-resistant plastic housing.
- **Space Saving**
 - ▶ Rackmount units fit standard 19" (482mm) relay racks. Compact 1U design takes up minimum space. 23" (584mm) units available.
- **Low Profile**
 - ▶ Cabinet units offer a narrow 1½" x 1 3/16" (38mm x 20mm) aluminum housing.
- **Aesthetically Pleasing**
 - ▶ Rackmount units have a black matte finish and a black cord. Cabinet, compact and industrial units have a grey finish and a black cord. Deluxe control and 20 Amp units have a putty white finish and a black cord. Most units with a putty white finish have a putty white cord. Hospital grade units have a white finish and a white cord.
- **Flexible Mounting**
 - ▶ Each unit features one of four different mounting types. Each mounting method has been designed to optimize the performance of the product. Complete mounting hardware and installation instructions are included with every unit.
- **Cord Properly Rated To Load Requirements**
 - ▶ 15 Amp units have a 14/3 SJT cord and a NEMA 5-15P plug. 20 Amp units have a 12/3 SJT cord and a NEMA 5-20P or NEMA 1%-20P plug.
- **Lighted Switch**
 - ▶ Most units have lighted ON/OFF switches to control power to the unit.
- **Resettable Circuit Breaker**
 - ▶ Provides overload protection
- **Product Warranty**
 - ▶ Two-Year
- **UL Recognized or Listed And CSA Certified**
 - ▶ Rackmount units are UL recognized components. All other units are UL listed and meet UL1363 standards. All 15A units are CSA certified.

Model Selection Guide

15 Amp Cabinet Plug-In Outlets

Model	Description/Specifications	Dimensions
4810ULBC/4810ULBD	10 outlets.	6' (1.8m) or 15' (4.6m) cord. Length 48" (1.2m). Receptacle center-to-center 4" (102mm).
		
7011ULBC/7011ULBD	11 outlets.	6' (1.8m) or 15' (4.6m) cord. Length 70" (1.8m). Receptacle center-to-center 6" (152mm).
		
7712ULBC/7712ULBD	12 outlets.	6' (1.8m) or 15' (4.6m) cord. Length 77" (2m). Receptacle center-to-center 6" (152mm).
		

20 Amp Cabinet Plug-In Outlets

Model	Description/Specifications	Dimensions
2008ULBC20R 2008ULBD20R 2008ULBC20R-TL 2008ULBD20R-TL	8 outlets. Units available with straight blade or NEMA 1%-20P twist lock plug.	6' (1.8m) or 15' (4.6m) cord. Length 20" (508mm). Receptacle center-to-center 1¼" (32mm).
		
4810ULBC20R 4810ULBD20R 4810ULBC20R-TL 4810ULBD20R-TL	10 outlets. Units available with straight blade or NEMA L5-20P twist lock plug.	6' (1.8m) or 15' (4.6m) cord. Length 48" (1.2m). Receptacle center-to-center 4" (102mm).
		
7011ULBC20R 7011ULBD20R 7011ULBC20R-TL 7011ULBD20R-TL	11 outlets. Units available with straight blade or NEMA L5-20P twist lock plug.	6' (1.8m) or 15' (4.6m) cord. Length 70" (1.6m). Receptacle center-to-center 6" (152mm).
		
7712ULBC20R 7712ULBD20R 7712ULBC20R-TL 7712ULBD20R-TL	12 outlets. Units available with straight blade or NEMA L5-20P twist lock plug.	6' (1.8m) or 15' (4.6m) cord. Length 77" (2m). Receptacle center-to-center 6" (152mm).
