The INVERTER will automatically initiate self-checks and start after 10 seconds.

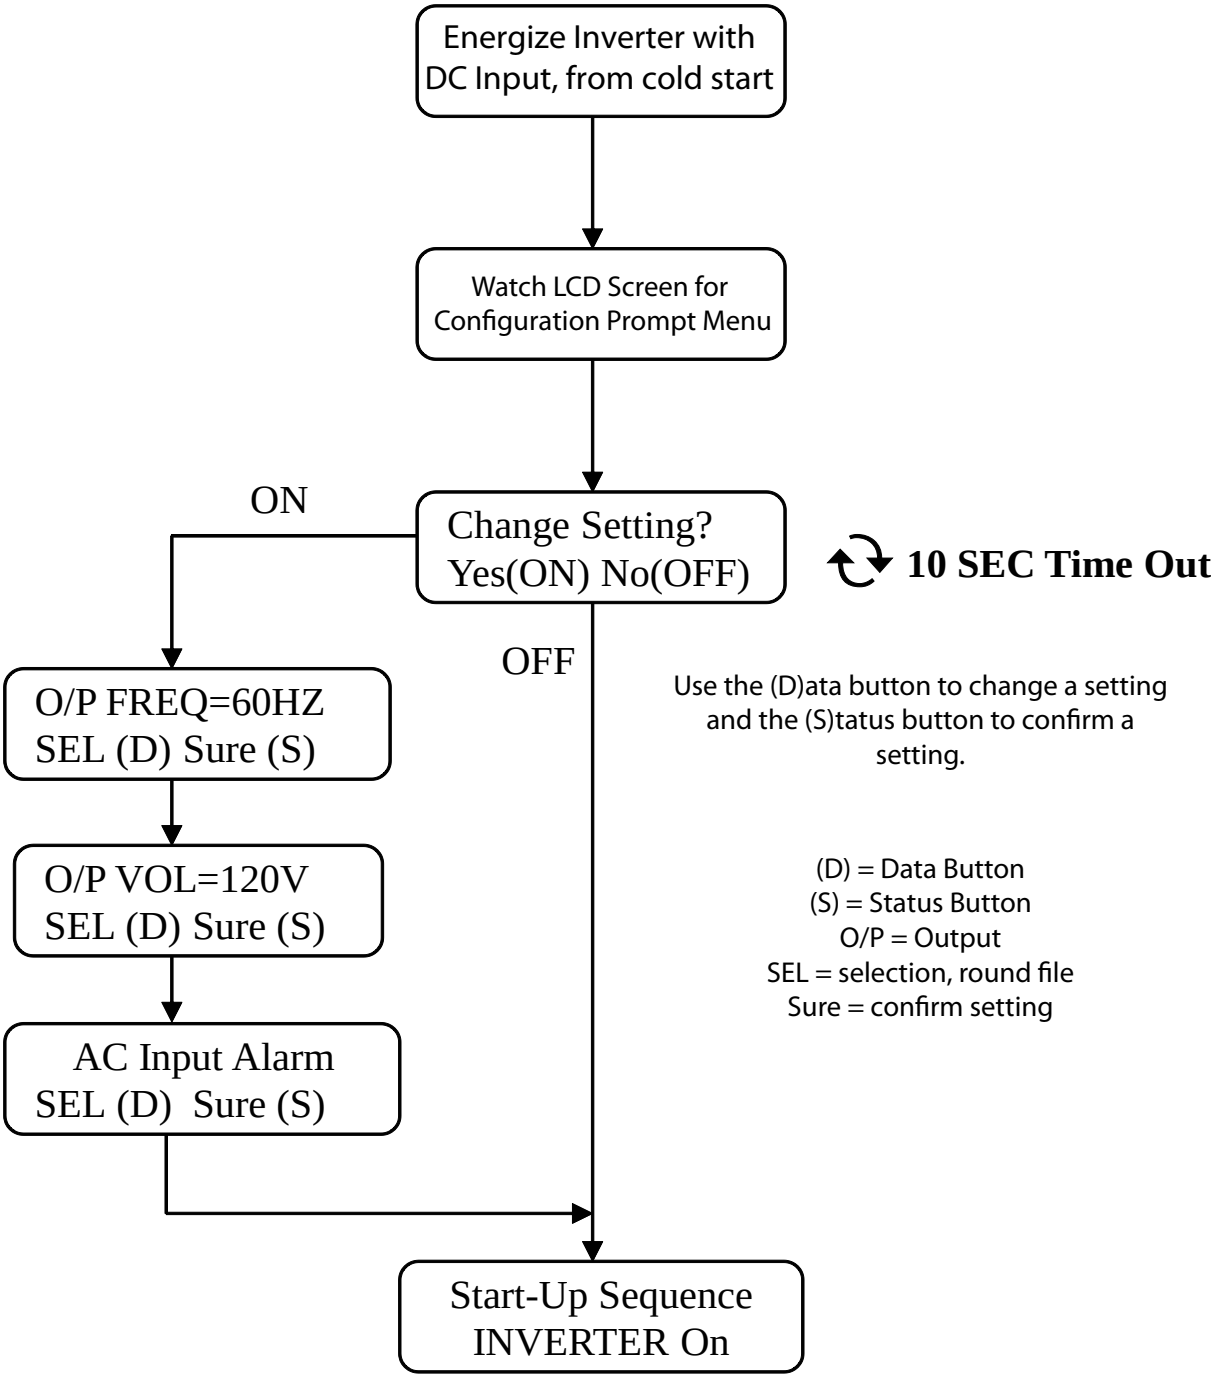

Use the (D)ata button to change a setting and the (S)tatus button to confirm a setting.

(D) = Data Button
(S) = Status Button
O/P = Output
SEL = selection, round file
Sure = confirm setting